
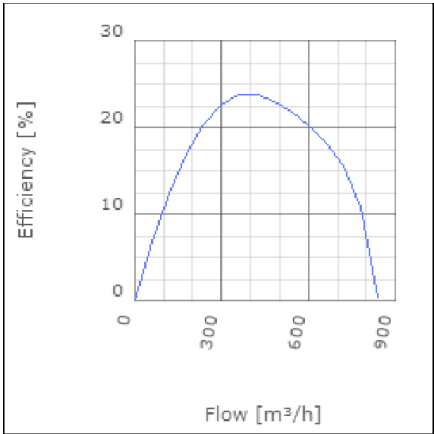
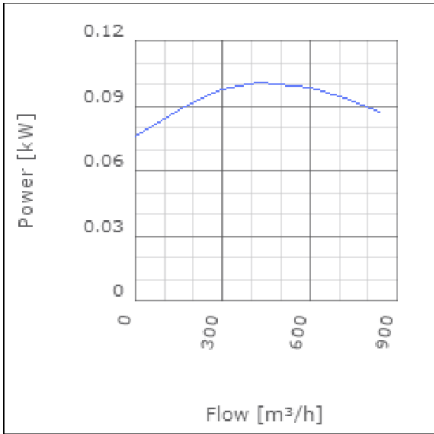
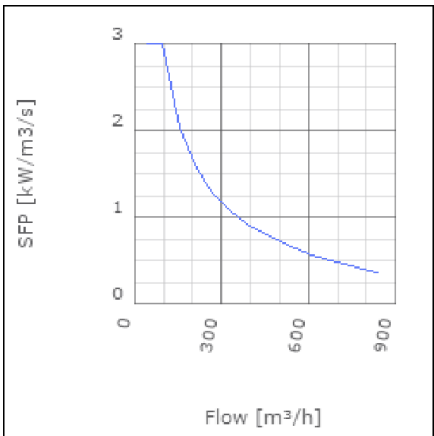
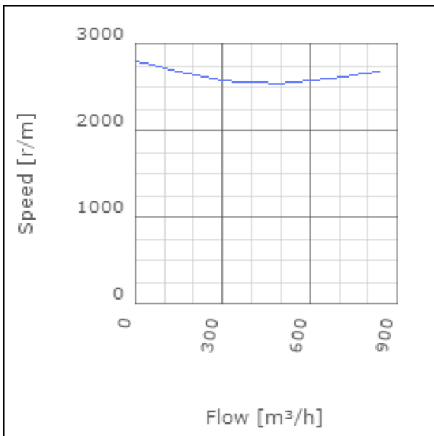
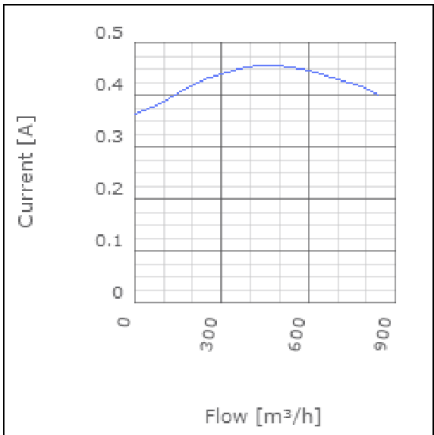



Technical data

Parameter	Value	Unit
Voltage	230	V
Phase	1	~
Frequency	50	Hz
Power	0.1	kW
Current	0.44	A
R.p.m.	2480	r/m
Max. temperature of transported air	65	°C
Max. temperature of transported air when speed-controlled	65	°C
Sound pressure level at 3 m	49	dB(A)
Length	233	mm
Width	344	mm
Height	344	mm
Weight	4.3	kg
Enclosure class, motor	44	IP
Insulation class, motor	F	
Capacitor	3	µF
Duct connection	ø150 mm	

Diagrams

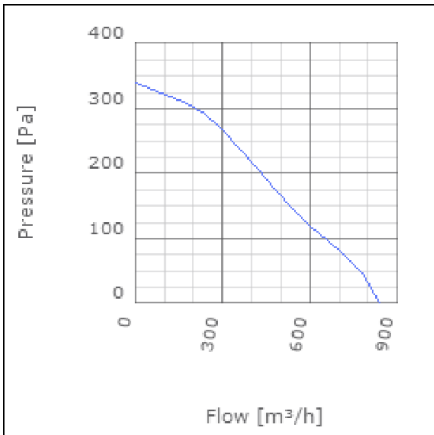


Dimensions

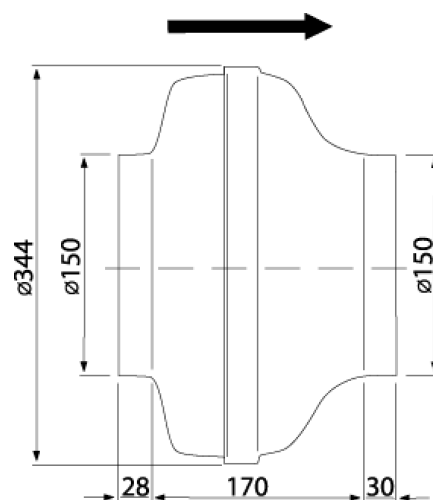

Wiring diagram

4040001

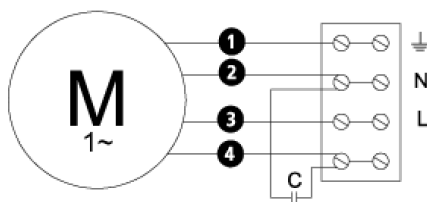

- (M) = Fan Motor
- (M1) = Fan Motor
- (M2) = Fan Motor
- (M3) = Rotor Motor
- 1 = Yellow/Green
- 2 = Black
- 3 = Blue
- 4 = Brown
- 5 = White (TW)
- 6 = Orange
- 7 = Grey
- 8 = Red
- 9 = Green
- 10 = Violet