

Notice:

The sensor kit contains the NTC sensor, polyurethane foam (type SOUDAFOAM 2K / Manufacturer Soudal) and the poliwave sheet with preassembled double adhesive tape. All the above mentioned components are packed in a plastic bag.

Note: Only this type of foam is allowed and the expiration date for this foam is ~ 1 year!!


The aluminium adhesive tape (roll with 50m) for the sensor fixation is dedicated for 500 appliances (0,10m for one appliance).

The fiber reinforced adhesive tape (roll with 50m) for the final poliwave insulating is dedicated for 40 appliances (1,25m for one appliance).


Both types of adhesive tape should be ordered separate, but not for each repair!!

Remedial action:

Instruction for sensor replacement: **Step1** : Unplug the appliance.

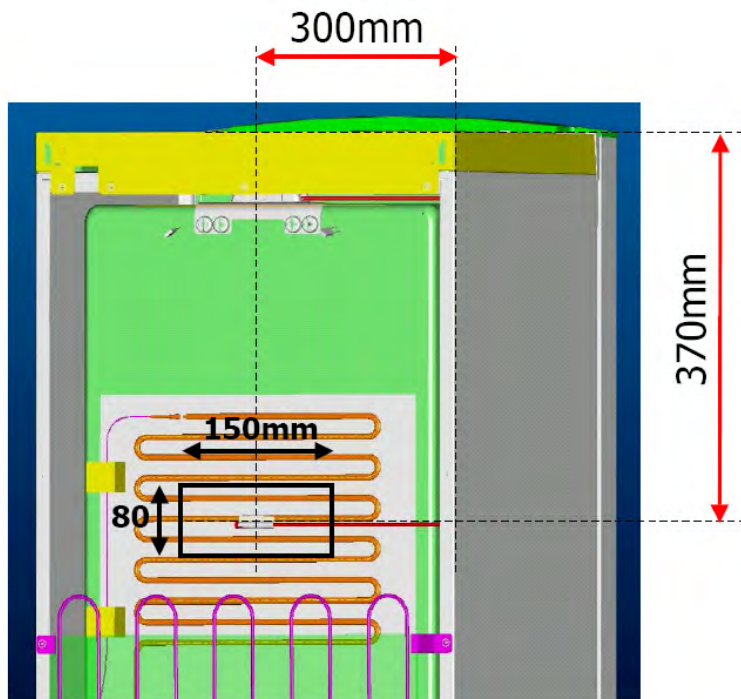

Step2: Mark the “window” on the foam at the rear side of the appliance as shown in the pictures.

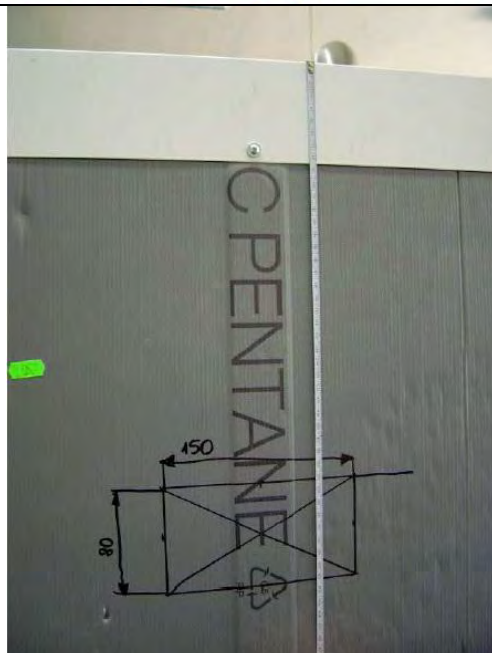

The sensor is placed 37cm below from the top cover.

	Step3: Cut the “window” in the foam at the rear side of the appliance as shown in the picture.
	Step4: Remove the foam from the cutting-out.
	Step5: Pull out the NTC and cut the wire.