

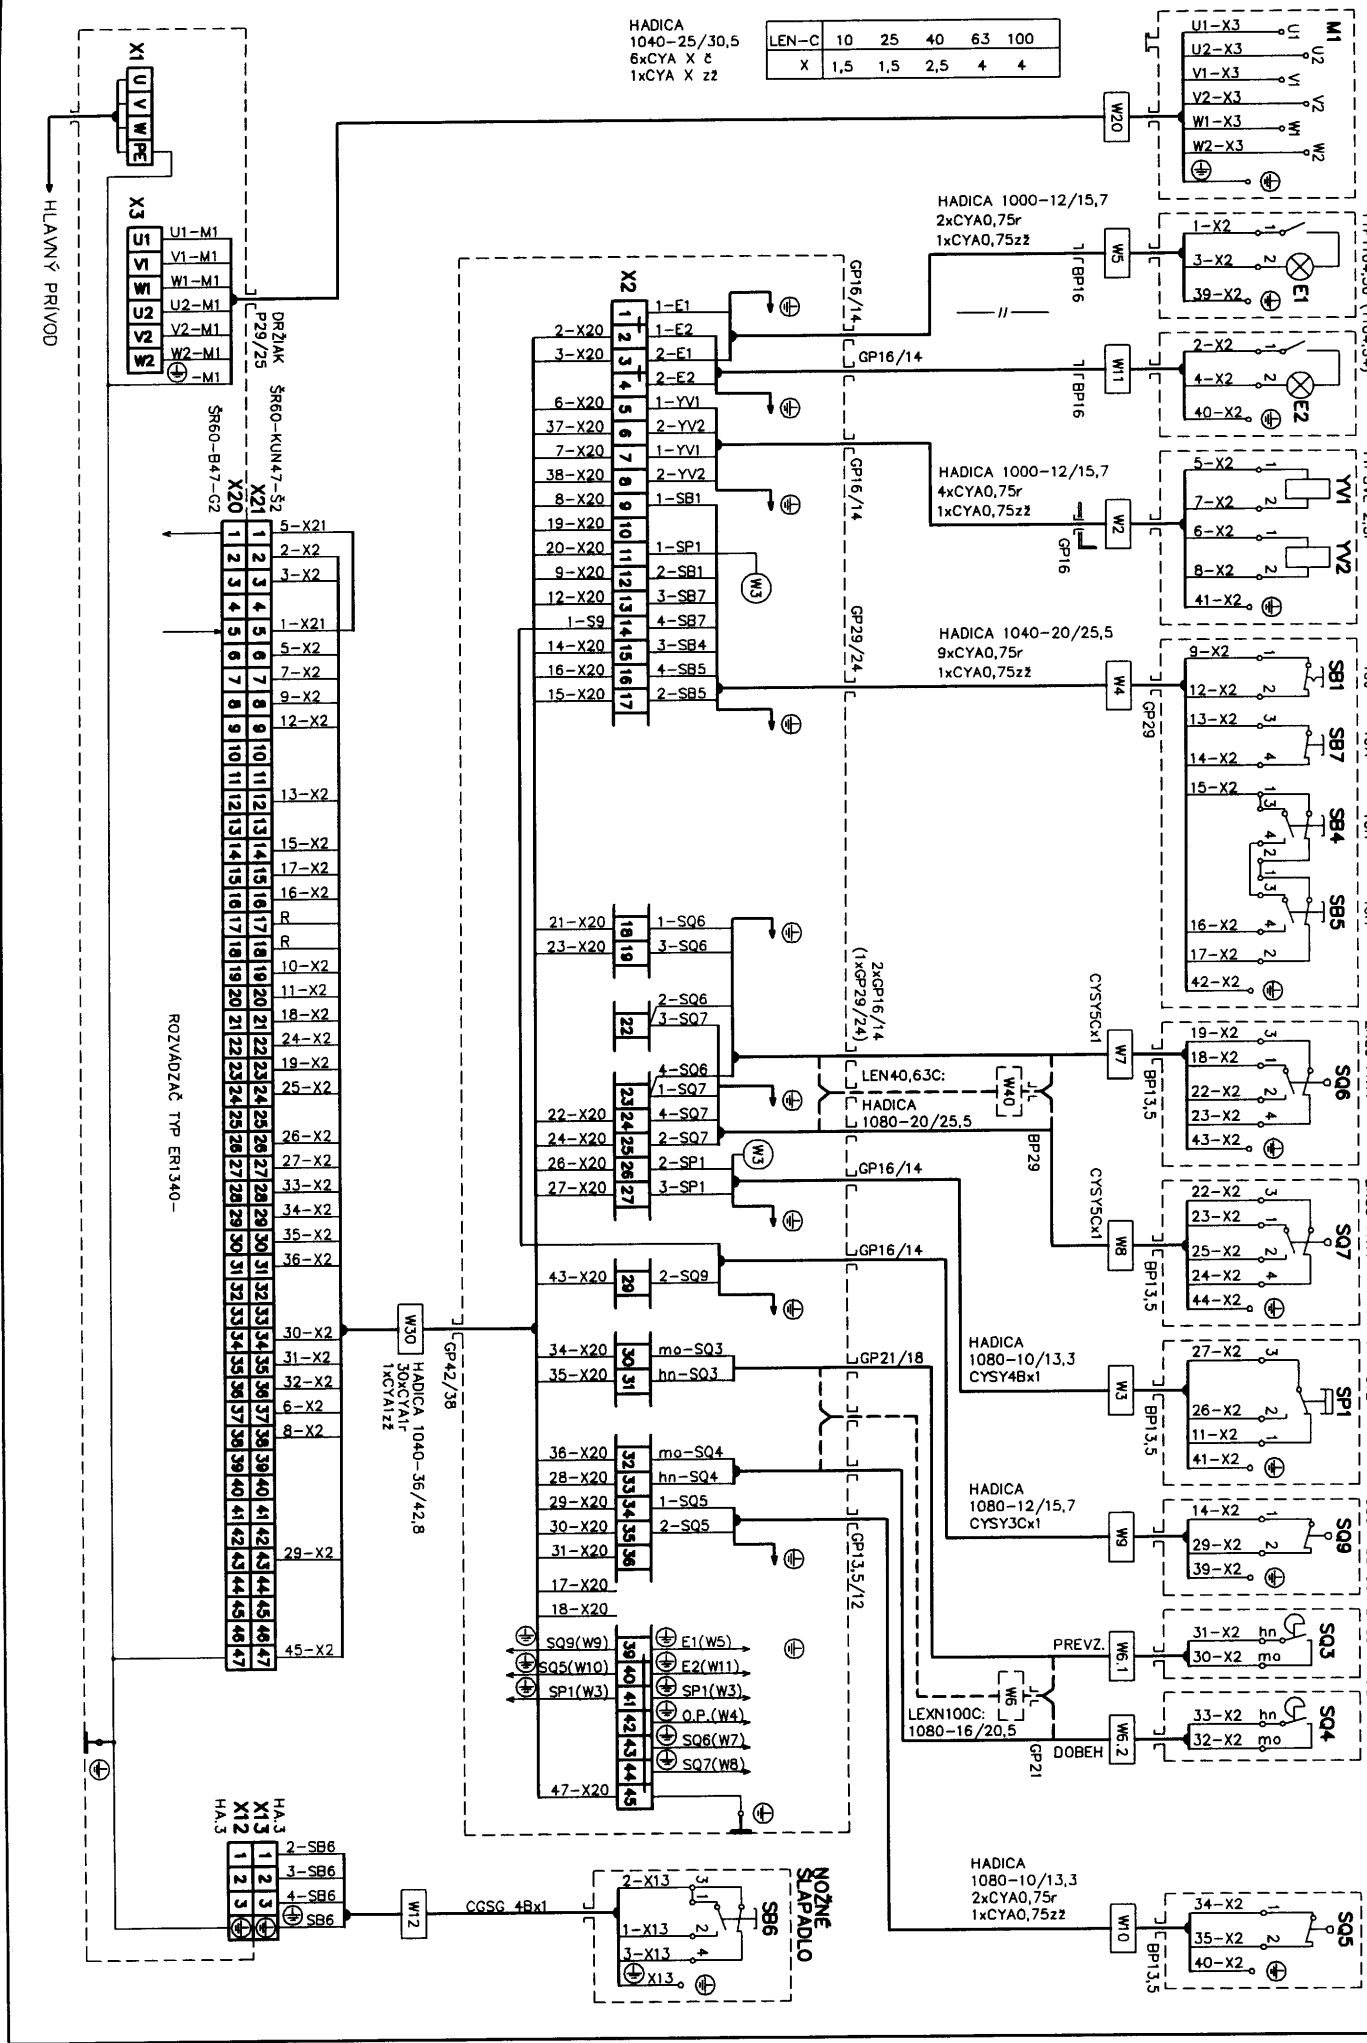


ELEKTROMOTOR
PRAC. PRIESTORU
ELMAG. VENTILY
OVYADACI PANEL
SPINAC
PREDLOHY
SPINAC
POSTKA
SPINAC
KRYT BARANA

LEN-C	10	25	40	63	100
X	1,5	1,5	2,5	4	4

HADICA
1040-25/30,5
6xCYA X 2
1xCYA X 22

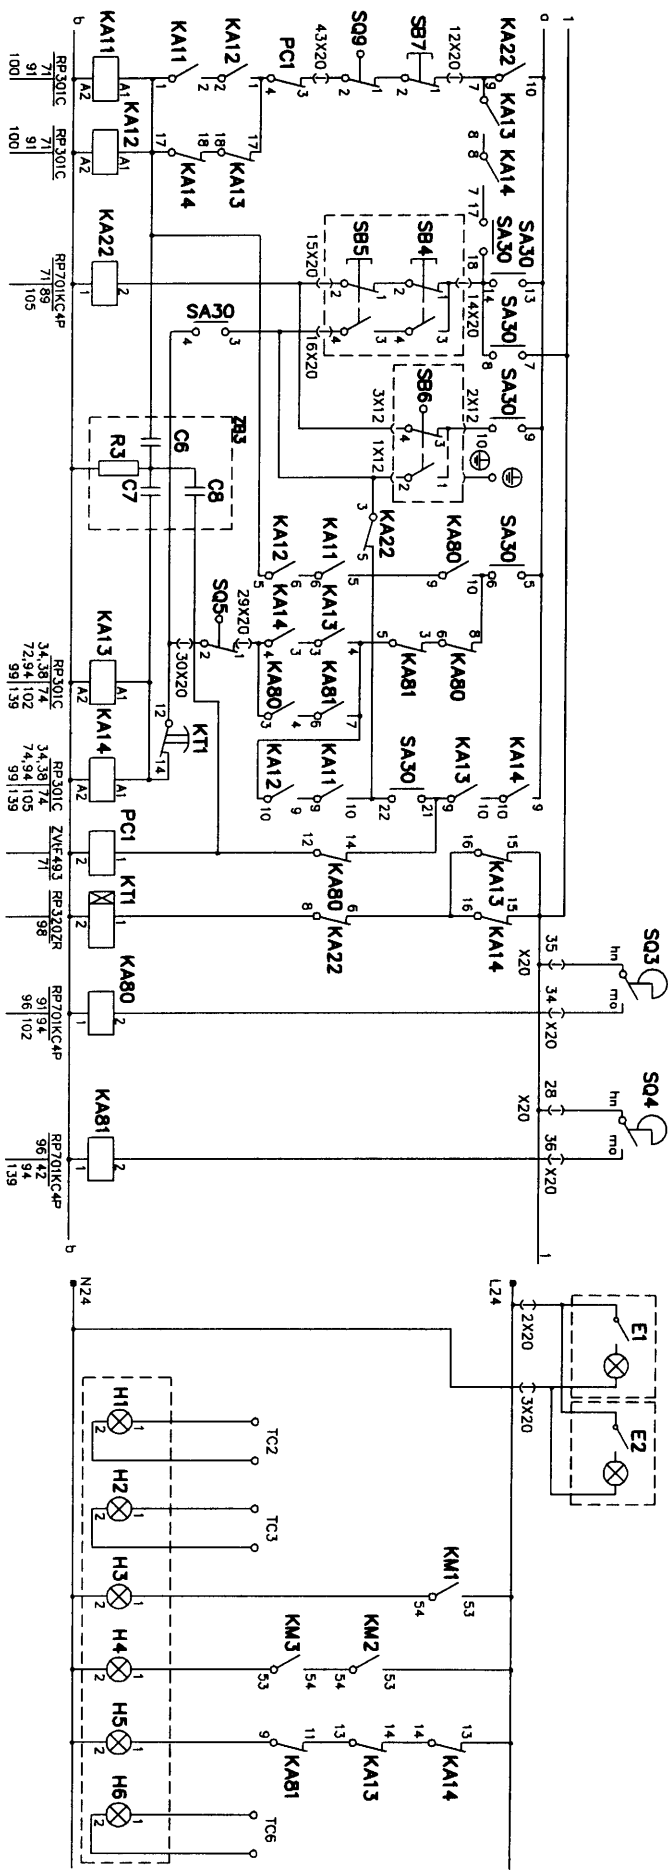

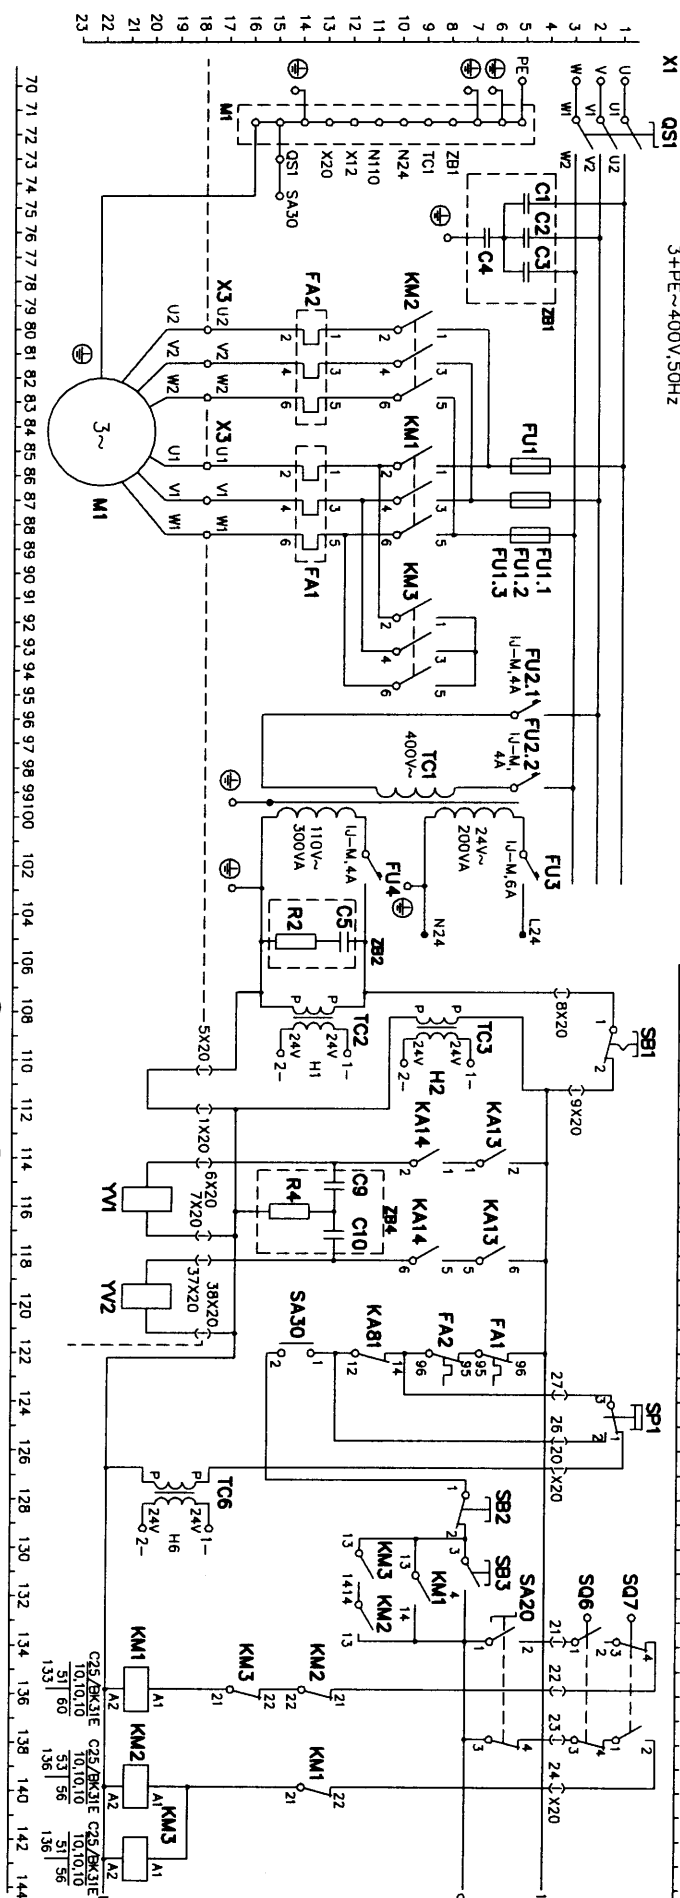


QS1	0	1
U1-U2		●
V1-V2		●
W1-W2		●

SA20		
1-2	●	●
3-4		●

KONEKTORY

X20



X12



LEGENDA

OS1 HĽAVNÝ VYPÍNAČ
EI,E2 OSVETLENIE PRACOVNEHO PRIESTORU

H1 EL. SIET'
H2 OVLADACE NAPÄTIE
H3 POMALOBIEŽKA
H4 RÝCHLOBIEŽKA
H5 KONTROLA DOBEHU
H6 KONTROLA TLAK. VZDUCHU

VY1,VY2 SOLENOIDOVÉ VENTILY
SA30 PREPÍNAČ REŽIMOV
SB1 CENTRAL STOP
SB2 MOTOR STOP
SB3 MOTOR ŠTART
SA20 PREPÍNAČ P.V.R.
SQ6,SQ7 KONCOVÝ SPÍNAČ PREDLOHY
SP1 TLAKOVÝ SPÍNAČ
SQ9 KONC. SP. STRIŽ. POISTKY
SB7 STOP Z TRVÁLEHO CHODU
SB4,SB5 TLAČÍTKA DVOURUČ. SPUŠŤANIA
SB6 NOŽNÉ ŠĽAPADLO
SQ3,SQ4 BEZDOTYKOVÉ SPÍNAČE
SQ5 KONC. SP. KRYTU BARANA


SA30	1	2	3	4	5
I. 1-2	●	●	●	●	●
II. 5-6	●	●	●	●	●
III. 7-8	●	●	●	●	●
IV. 9-10	●	●	●	●	●
V. 13-14	●	●	●	●	●
VI. 17-18	●	●	●	●	●
VII. 21-22	●	●	●	●	●

ZB1,ZB2,ZB3,ZB4

C1,C2,C3,C9,C10	TC253,M23 250V AC
C4	TC250,5M1,250V AC
C5	TC252,M1 250V AC
C6,C7,C8	TC251,50K 250V AC
R2,R3,R4	TR146,47dm,1W AC

M1 EL.MOTOR	
LEN10C	AP112M84s: 1.1/1.5kW; 3.1/3.2A
LEN25C	AP132S84: 2.2/3kW; 5.6/6.1A
LEN40C	AP132M84: 3/4kW; 7/7.9A
LEN63C	F16CM23: 5/7.5kW; 12/15A
LENX100C	F16CL23: 6/10kW; 14/20A

	α1	α2	α3
LEN10C			
LEN25C			
LEN40C			
LEN63C			
LENX100C			

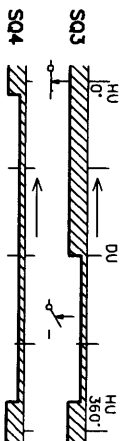

	FU1	FU1.1 FU1.2 FU1.3	FA1	FA2
LEN10C	2410T: 10A	R100A: 3.4A	R100A: 3.4A	R100A: 3.4A
LEN25C	2410T: 16A	R100A: 5A	R100A: 7A	R100A: 7A
LEN40C	2410T: 20A	R100A: 7A	R100A: 10A	R100A: 10A
LEN63C	2420T: 35A	R100A: 10A	R100A: 15A	R100A: 15A
LENX100C	2420T: 50A	R100A: 15A	R101A: 23A	R101A: 23A

	E2	SQ6	SQ7	SQ9
LENX100C	●	●	●	●
LEN10C,40C,63C	●	●	●	●

RELE	RP301C 53	3TH22 53	SRH122	POZICIA	RP301C 53	3TH22 53	SRH122
KA11	1-2 5-6 9-10	13-14 23-24 33-34	13-14 53-54 83-84	71 91 100			
KA12	1-2 5-6 9-10	13-14 23-24 33-34	13-14 53-54 83-84	71 91 100			
KA13	1-2 5-6 9-10	13-14 23-24 33-34	13-14 53-54 83-84	71 91 100			
KA14	1-2 5-6 9-10	13-14 23-24 33-34	13-14 53-54 83-84	71 91 100			