

Brand : ELECTROLUX

Prod. number : 913 76 13-51

Model : EWT 1050

Countries : Hungary Poland

Czechia Slovakia

TECHNICAL SPECIFICATIONS

RV
95P22599

TOP LOAD / STAINLESS STEEL DRUM AND CARBORAN TUB
DOOR POSITIONNING

GENERAL FEATURES

Supply voltage 230 V
Dimensions (height, width, depth) 85/40/60 cm
Dryclothes loading capacity 4,5 kg
Drum rotation speed (washing/spinning) 55/1000 r.p.m
Intermediate speed 1000 r.p.m

WATER LOAD CAPACITY (without clothes) :

Heating Level I 2 l
Heating Level II 2 l

WATER PRESSURE :

Max./Min. 0,8/0,05 MPa

CONSUMPTIONS (COTTON 60°) :

Energy 0,83 kWh
Water 42 l
Time 130 min

TECHNICAL PARTICULARS

DRAIN PUMP :

Maxi head 100 cm
Mini head 70 cm
Delivery rate 25 l/min
Power absorbed 30 W
Winding resistance 150/200 Ω

HEATING ELEMENT :

Power absorbed 1950 W
Resistance 27 Ω

WATER VALVE :

Delivery rate 5,5 l/min
Coil resistance 4300 Ω

CYCLING PUMP :

Delivery rate 12 l/min
Power absorbed 18 W
Winding resistance 200 Ω

DOOR INTERLOCK :

Type voltmetric
Internal door locking 0,02 s
Internal door release 0,02 s

TEMPERATURE PROBE (NTC) 6 k Ω at 20°C

PRESSURE SWITCH :

Heating Level I 50/30 mm
Heating Level II 50/30 mm

PRESSURE SWITCH ANALOGIC :

Analogic Level 000 mm - 44,7 Hz
Analogic Level 300 mm - 36,1 Hz

PROGRAMME SELECTOR :

Identification mark 132016900 - EWM2000

MODULE REGULATION SPEED :

Module programmed 1462875..
Type (case) 124303925
Supply voltage 230 V

USER INTERFACE :

Identification mark 146205404

DOOR POSITIONNING (electric):

Identification mark 146132000

COLLECTOR MOTOR :

Pulley ratio 12
Insulation class B/F
Power absorbed : washing 300 W
Power absorbed : spinning 420 W
Washing speed 660 r.p.m
Spinning speed 12000 r.p.m
Rotor : coil resistance (8-9) 1,6 Ω
Stator : coil resistance (5-10) 1,23 Ω

TACHOGENERATOR :



Coil resistance (3-4) 135 Ω

PROGRAMM SELECTOR

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●	●		
4		●		●	
5		●	●	●	
6				●	●
7	●				
8	●				●
9	●			●	
10		●		●	●
11			●		●
12	●			●	●
13	●		●		
14			●	●	
15	●		●		●
16			●	●	●
17	●		●	●	
18	●		●	●	●
19	●	●			
20		●	●		●
21					●
22		●			
23				●	
24			●		
	C1	C2	C3	C4	C5

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●	●		
4		●		●	
5		●	●	●	
6				●	●
7	●				
8	●			●	
9		●		●	●
10			●		●
11	●			●	●
12			●	●	
13	●		●		●
14	●		●	●	
15	●		●	●	●
16	●	●			
17		●	●		●
18					●
19		●			
20				●	
21			●		
	C1	C2	C3	C4	C5

C6 COMMUN					
1		●	●	●	●
2		●			●
3		●		●	
4				●	●
5		●		●	●
6			●		●
7			●	●	
8			●	●	●
9		●	●		●
10		●			
11				●	
12			●		
	C1	C2	C3	C4	C5

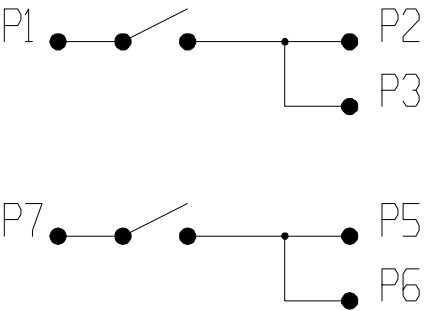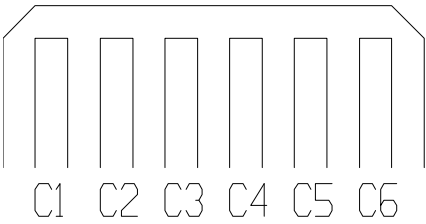

EWM2000 19/11/99


[illegible]

EWM2000 19/11/99

[illegible][illegible]

WIRING DIAGRAM

146 1669 00

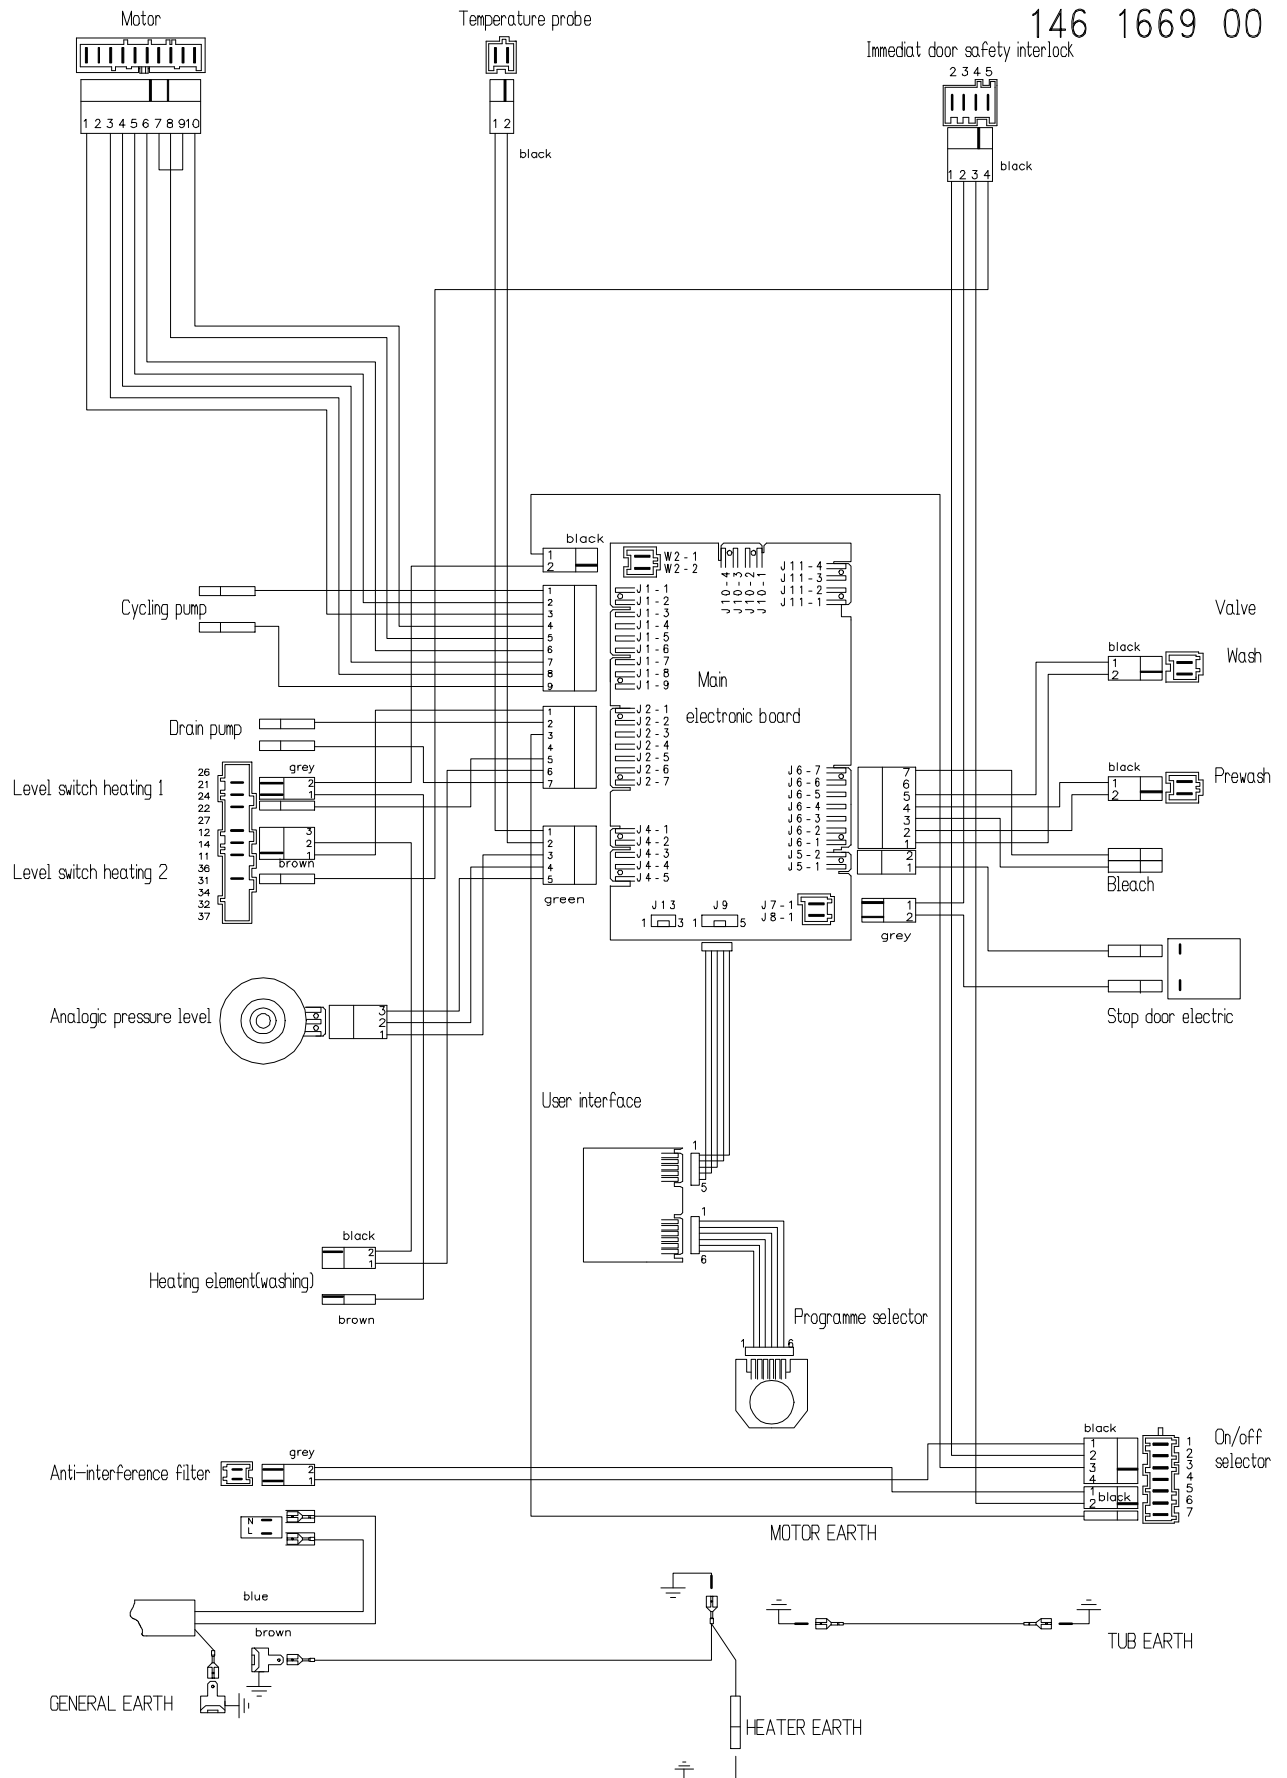

ELEMENTARY DIAGRAM

